

## Summit LED Strip Light - Static White - 32ft

AL-SL-DL-CC-IP20-24-32

Single Color, Non-Waterproof, Long Max Run



## DESCRIPTION

Summit Strip Lights are the ultimate choice for seamless accent lighting. Summit creates a clean, continuous line of light with no visible diodes and no diffusion lens required. Advanced CSP technology delivers smooth, even illumination while improving efficiency and long term reliability. With Integrated Chip (IC) technology, you can install continuous runs up to 32 feet without voltage drop, saving time, labor, and materials compared to traditional Constant Voltage strips.

Each cut section regulates its own current for uniform brightness from end to end. Featuring a 90+ CRI, these strip lights provide accurate color rendering and vibrant illumination. Available in four color temperatures, these strips offer a tailored solution for any space. Compatible with non-dimmable power supplies and DC decoders/remotes, installation and upgrades are quick and hassle-free.

## KEY FEATURES

Up to 600  
Lumens/foot


CRI 90+

CSP  
IlluminationIP20 Non-  
Waterproof

## PRODUCT SPECIFICATION CHART

| PHYSICAL                   |                                        | ELECTRICAL            |                                                                                              |
|----------------------------|----------------------------------------|-----------------------|----------------------------------------------------------------------------------------------|
| Reel Length                | 32.8' (10m)                            | Input Voltage         | 24VDC                                                                                        |
| Width                      | 0.393" (10mm)                          | LED Type              | 2022x                                                                                        |
| Height                     | 0.11" (2.7mm)                          | LED Quantity          | 85 LED's/ft (280 LED's/m)                                                                    |
| Cut Length                 | 0.98" (25mm)                           | Max Power Consumption | 2.9W/ft (9.6W/m)                                                                             |
| Adhesive Backing           | Yes                                    | Max Run Length        | 32.8' (10m)                                                                                  |
| Mounting method            | Adhesive Tape                          | Compatible Connectors | AL-SL-CN-DLS-SPLICE / AL-SL-CN-DLS-PIGTAIL<br>AL-SL-CN-DLS-JUMPER / AL-SL-CN-DLS-ANGLESPLICE |
| Average Lifespan           | 50,000 Hours                           | ENVIRONMENTAL         |                                                                                              |
| Warranty                   | 5 years                                | IP Rating             | IP20                                                                                         |
| PHOTOMETRIC                |                                        | Suitable Uses         | Dry, Indoor                                                                                  |
| CRI                        | 90                                     | Max Operating Temp    | -4 - 122° F (-20 - 50° C)                                                                    |
| Max Luminous Flux          | Up to 341.46 Lumens/ft (1120 Lumens/m) | Max Storage Temp      | -22 - 176° F (-30 - 80° C)                                                                   |
| Efficacy (lumens per watt) | Up to 117 Lumens/Watt                  | CONTROL               |                                                                                              |
| Beam Angle                 | 180°                                   | Dimmable              | Yes                                                                                          |
| LED Color Options          | 2700K, 3000K, 4000K, 6000K             | CV/CC/SPI/DMX         | Constant Current                                                                             |
| RGB Wavelength Ranges      | N/A                                    | STANDARDS/CERTS       | CE   UL   RoHS   LM80                                                                        |

TECHNICAL DRAWINGS

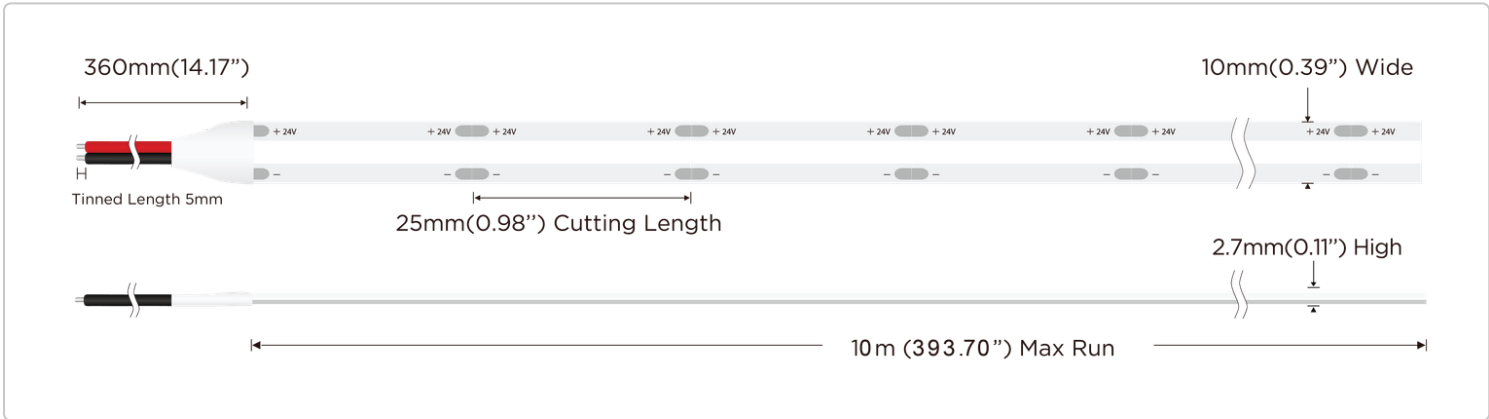

SKU BUILDER

AL-SL-DL-CC-IP20-24

SUMMIT LED STRIP LIGHT  
STATIC WHITE - 32FT

WHITE COLOR OPTION

27K | 2700K WHITE  
3K | 3000K WHITE  
4K | 4000K WHITE  
6K | 6000K WHITE

32

32 FOOT MAX RUN



Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.