



W-SERIES DYNAMIC VARIABLE WHITE COLOR TUNING FLEXIBLE LED STRIP LIGHT

Ultra Bright (18 LEDs/foot)

MODEL: AL-SL-W-U-CCT



Description

aspectLED's Dynamic White Color Tuning Flexible LED strip lights are a perfect solution for a wide variety of architectural and accent lighting applications including; signage, wall washing, back-lighting, pathway lighting and decorative lighting. Our Ultra Bright W-Series color tuning flexible LED strip lights are made with wire leads on both ends of each 16.4' reel and can be cut every 4", allowing you to cut pieces to the exact length that you need.

[Learn more](#)



www.aspectLED.com | 888.503.1317 | sales@aspectled.com

For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice. Copyright © 2020 ASP Holdings, Inc. All rights reserved.




4900 Constellation Drive | Saint Paul, MN 55127


	NON-WATERPROOF	WATER RESISTANT	WATERPROOF
Dimensions	3/8" (10mm) wide 1/16" (2mm) thick 16.4' (5M) long	3/8" (10mm) wide 1/8" (3mm) thick 16.4' (5M) long	1/2" (12.7mm) wide 1/4" (5.4mm) thick 16.4' (5M) long
Distance Between LEDs	1/2" (12mm)	1/2" (12mm)	1/2" (12mm)
Cut Length	4" (100.16mm)	4" (100.16mm)	4" (100.16mm)
IP Rating	IP20 Indoor Use Dry Location	IP65 Splash Resistant	IP68 Submersible
Adhesive Backing	Yes / 3M Adhesive	Yes / 3M Adhesive	No
Mounting Method	Adhesive Backing	Adhesive Backing	Mounting Straps or Adhesive Caulk
Input Voltage	24VDC	24VDC	24VDC
Beam Angle	120 Degrees	120 Degrees	120 Degrees
Dimmable	Yes	Yes	Yes
Max Power Consumption	4.4 Watts per foot (14.4 Watts per meter)	4.4 Watts per foot (14.4 Watts per meter)	4.4 Watts per foot (14.4 Watts per meter)
Max Luminous Flux	Up to 450 Lumens per foot (varies by LED color)	Up to 450 Lumens per foot (varies by LED color)	Up to 450 Lumens per foot (varies by LED color)
Color Temperature	Warm White = 3000K Neutral White = 4000K DayWhite = 6000K	Warm White = 3800K Neutral White = 4900K DayWhite = 7000K	Warm White = 3800K Neutral White = 4900K DayWhite = 7000K
LED Type	SMD 5050 RGB LED Chips	SMD 5050 RGB LED Chips	SMD 5050 RGB LED Chips
LED Quantity	18 LEDs per foot (300 per reel)	18 LEDs per foot (300 per reel)	18 LEDs per foot (300 per reel)
Max Run	32 feet @ 24VDC	32 feet @ 24VDC	32 feet @ 24VDC
Weight	0.4 lbs per reel	0.6 lbs per reel	1.2 lbs per reel
Estimated Lifespan	50,000 hours	50,000 hours	50,000 hours
Warranty	1 Year	1 Year	1 Year
Suitable Uses	Dry Location Only	Dry or Damp Locations	Dry, Damp or Wet Locations
Standards/Certifications	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS

Strip Light Dimensions


24VDC - NON-WATERPROOF

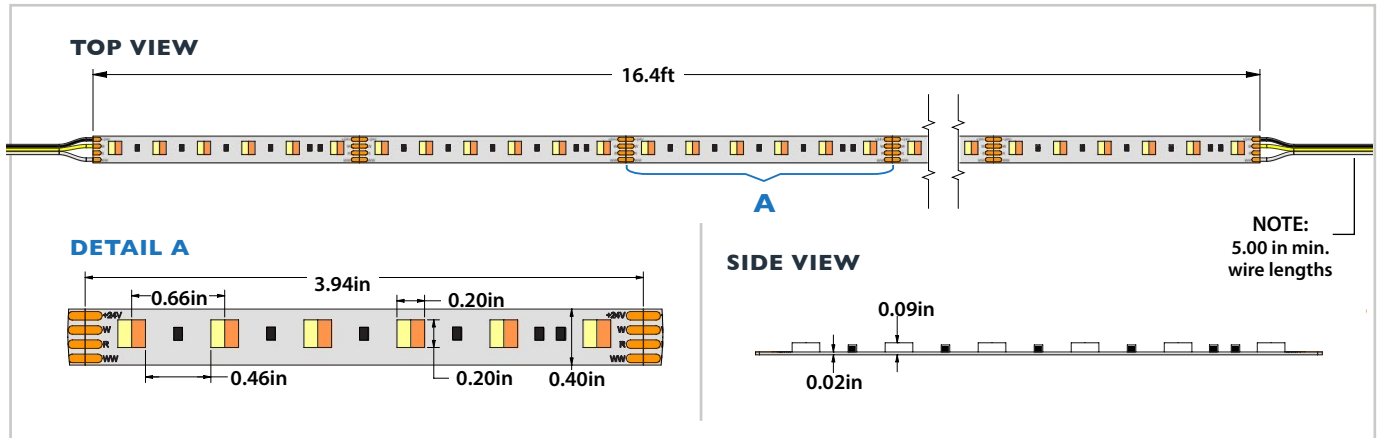

24VDC - WATER RESISTANT

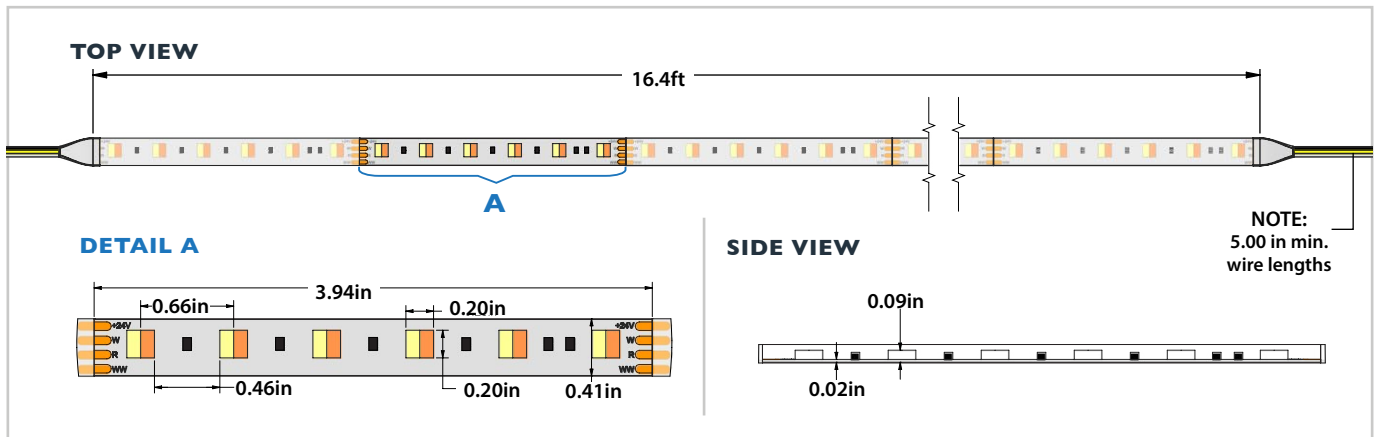

24VDC - WATERPROOF

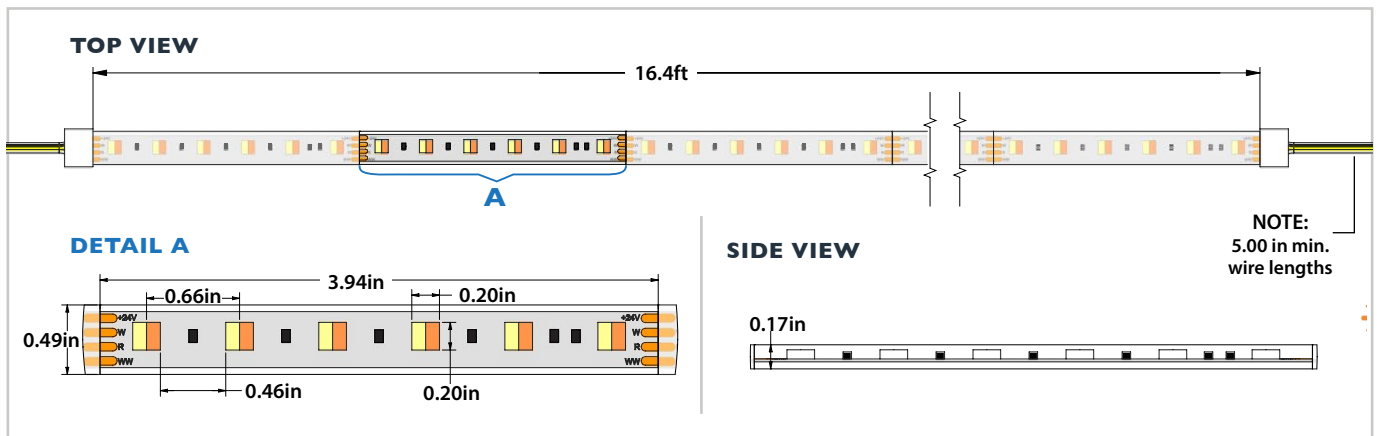

W-SERIES DYNAMIC VARIABLE WHITE COLOR TUNING
MODEL: AL-SL-W-U-CCT

Accessories

30 Watt LED Power Supply

SKU: AL-PS-W-30

60 Watt LED Power Supply

SKU: AL-PS-W-60

100 Watt LED Power Supply

SKU: AL-PS-W-100

200 Watt LED Power Supply

SKU: AL-PS-W-200



Wireless Dynamic White Color Tuning Multi-Zone LED Handheld Remote Controller

SKU: AL-CTLR-CCT-4ZRF-RMT



Wireless RGBW 4 Channel LED Controller with Channel Pairing

SKU: AL-CTLR-RGBW-4CP



SKU Builder

MODEL #:

AL-SL

WATERPROOFING:

WN - Non-Waterproof
WR - Water Resistant
WW - Waterproof

BRIGHTNESS:

U

U - Ultra Bright

LED LIGHT COLOR:

CCT

CCT - White Color Tuning

VOLTAGE:

24

24 - 24VDC