


WideLine LED Strip Light - Tunable White

AL-SL-W90-IP20-24-CCT

Tunable White LED Strip Light



DESCRIPTION

Create the perfect lighting environment with the WideLine Tunable White LED Strip Light, designed to deliver high-quality, adjustable illumination for a variety of indoor applications. With a tunable white range from 2700K to 6000K and a 90+ CRI, WideLine allows you to customize your space with warm, comfortable tones or crisp, daylight-inspired illumination while maintaining accurate color rendering.

Featuring 18 LEDs per foot, a wide 120-degree beam angle, and up to 210 lumens per foot, WideLine provides smooth, consistent lighting with excellent brightness and coverage. The flexible design and cut intervals every 3.94" make it easy to customize installations for cabinets, displays, architectural accents, and other dry-location applications.

PHYSICAL		ELECTRICAL	
Dimensions	16.4' (5m) 0.39" (10mm) 0.09" (2.1mm)	Input Voltage	24VDC
Cut Length	3.94"	Efficacy	2700K: 38 lm/W 6000K: 40 lm/W
Adhesive Backing	Adhesive Tape 3M 9080	LED Quantity	18 LED's/ft (60 LED's/m)
Mounting Method	Surface Mounted	Max. Power Consumption	4.39W/ft (14.4W/m)
Average Lifespan	50,000 Hours	Max Run Length	16.4' (5m)
Warranty	5 Years	Pin/Wire Count	3 pin
Weight	0.2 lbs	Max Wire Gauge	22 AWG
PHOTOMETRIC		LED Chip Type	SMD 5050
Max Lumens	2700K: 195 lm/ft 6000K: 210 lm/ft	Compatible Connectors	AL-SL-CN-W90CCT-(JUMPER/PIGTAIL/SPLICE)
CRI	90	ENVIRONMENTAL	
Beam Angle	120°	IP Rating	IP20
LED Color Options	2700K – 6000K	Suitable Uses	Dry Locations Only
CONTROL		Max. Operating Temp	-4 - 122° F (-20 - 50° C)
CV, CC, DMX or SPI	Constant Voltage	Max. Storage Temp	-22 - 176° F (-30 - 80° C)
STANDARDS			
Certifications		CE UL RoHS LM80	


TECHNICAL DRAWINGS



SKU BUILDER

AL-SL-W90-IP20-CCT

WIDELINE LED STRIP LIGHT - TUNABLE WHITE

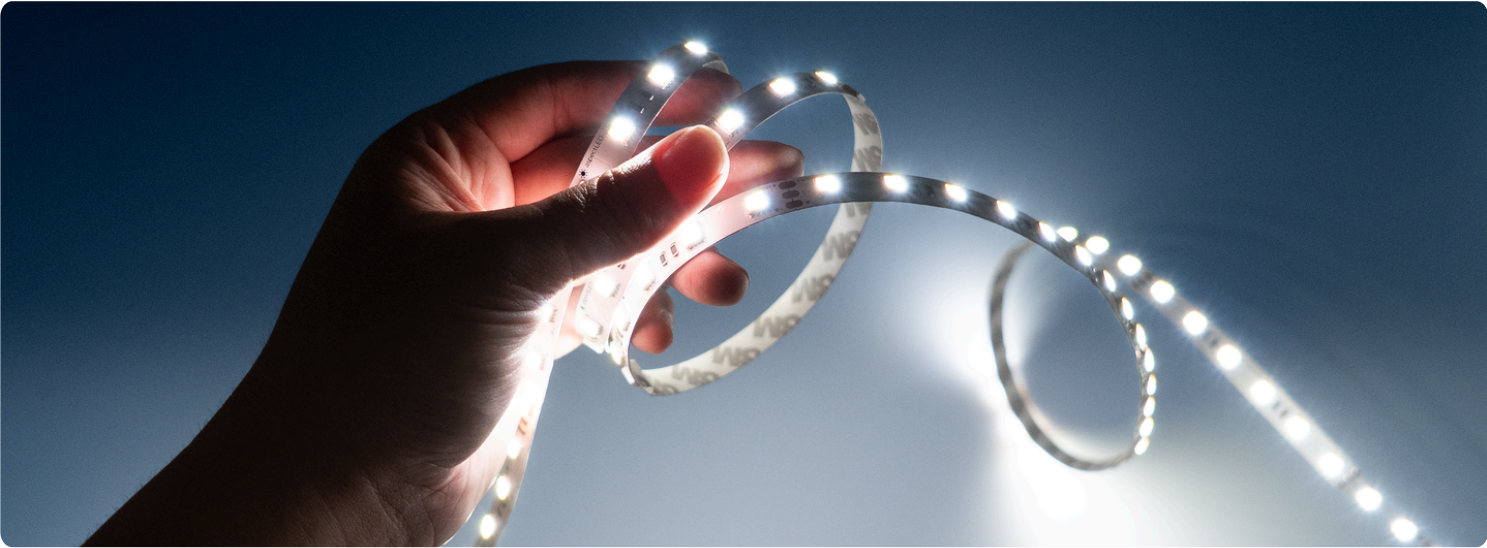

Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.