

DESCRIPTION

Sauna Neon Light TopFlex features a flexible, top-bending design that creates smooth curves and clean lines in your sauna or other harsh environments. With a maximum run length of 16.4 feet on a single power supply, it allows for quick, cost-effective installation.

The dotless design produces a continuous, seamless neon glow, while cuttable sections ensure a perfect fit for custom sauna projects. Featuring a 90+ CRI and an IP67-rated, UV- and ozone-resistant silicone housing, it's built to withstand rain, sun, snow, and more. Available in 2700K and 3000K color temperatures.


KEY FEATURES

- High Temp
Rated
- Top Bending
- 2700K or
3000K
- IP67

PRODUCT SPECIFICATION CHART

PHYSICAL		ELECTRICAL	
Reel Length	16.4' (5m)	Input Voltage	24VDC
Width	0.51" (13mm)	LED Type	SMD 3030
Height	0.27" (7mm)	LED Quantity	48 LEDs/ft (160 LEDs/m)
Cut Length	0.98" (25mm)	Max Power Consumption	1.82Wft (6W/m)
Bend Radius	3.14" (80mm)	Max Run Length	16.4' (5m)
Mounting method	Adhesive Tape	Compatible Connectors	N/A
Bend Angle	Top	ENVIRONMENTAL	
Warranty	5 years	IP Rating	IP67
Average Lifespan	50,000 Hours	Suitable Uses	Dry and Damp Locations
PHOTOMETRIC		Max Storage Temperatures	-22°F to 212°F (-30°C to 100°C)
CRI	80	Max Operating Temperatures	-22°F to 212°F (-30°C to 100°C)
Max Luminous Flux	Up to 230 lumens/ft (750 lumens/m)	CONTROL	
Efficacy (lumens per watt)	126 Lumens/Watt (125 Lumens/Watt)	Dimmable	Yes
Beam Angle	120	CV or CC or SPI or DMX?	Constant Voltage
LED Color Options	2700K, 3000K	STANDARDS/CERTS	
		CE UL RoHS LM80	

TECHNICAL DRAWINGS

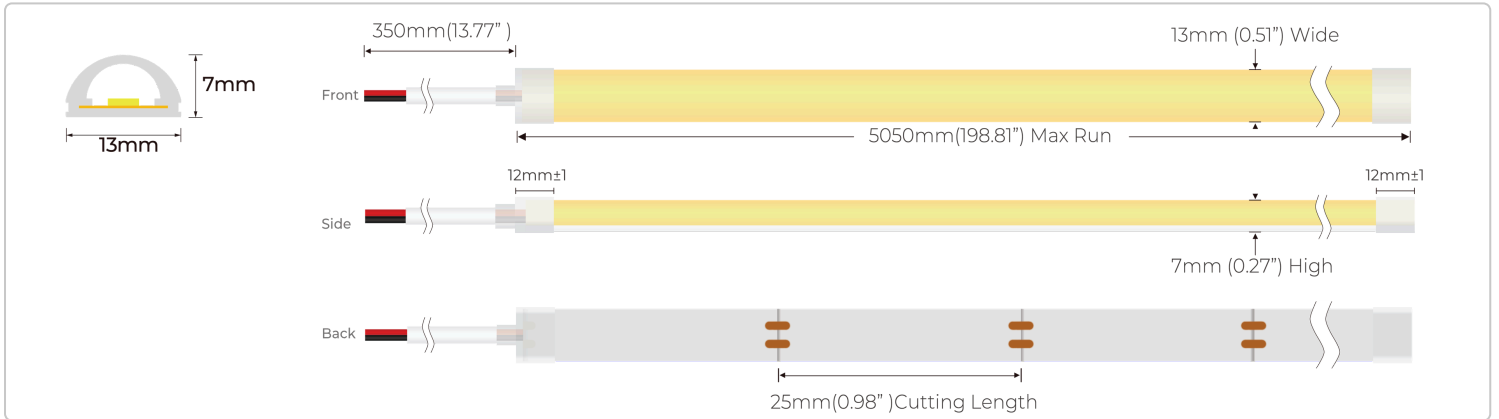

SKU BUILDER

AL-NF-SA-1307-24


SAUNA NEON LIGHT



WHITE COLOR OPTION

27 | 2700K WARM WHITE

30 | 3000K SOFT WHITE

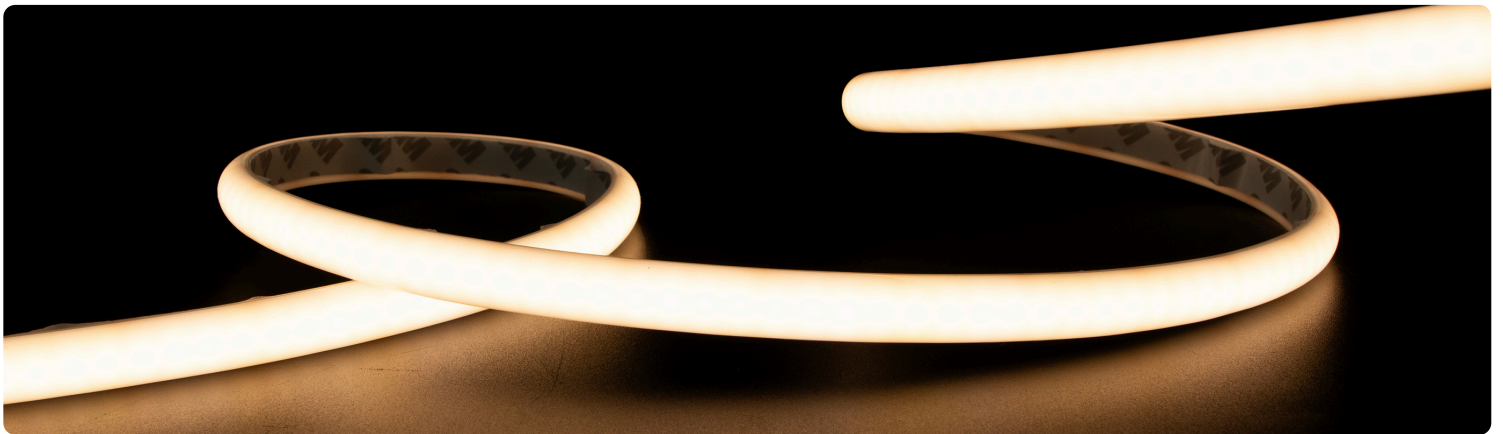

Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.