


Architect LED Strip Light - Static White

AL-SL-AR-IP20-24

Single Color, Non-Waterproof



DESCRIPTION

The Architect LED Strip Light Static White is built for projects where precision, output, and flawless illumination are essential. Designed for architectural applications, it delivers exceptional brightness and uniformity to elevate any space. Featuring advanced SMD 2022 high-density LEDs, it creates a smooth, continuous line of light with minimal spotting.

With output up to 700 lumens per foot and 165 lumens per watt, it provides powerful, efficient illumination for performance-driven environments. Available in color temperatures from 2700K to 6000K, it provides consistent color matching across projects. Ultra-small 1.09" cut intervals allow for precise layouts with minimal waste, while optimization for shallow aluminum channels ensures clean, professional results in tight spaces.


KEY FEATURES

- 
700 Lm/Ft
- 
CRI 90
- 
High Efficacy
- 
1.09" Cut Length

PRODUCT SPECIFICATION CHART

| PHYSICAL | | ELECTRICAL | |
|----------------------------|--|-----------------------|--|
| Reel Length | 16.4' (5m) | Input Voltage | 24VDC |
| Width | 0.393" (10mm) | LED Type | 2022x |
| Height | 0.08" (2.1mm) | LED Quantity | 87 LED's/ft (288 LED's/m) |
| Cut Length | 1.09" (27.8mm) | Max Power Consumption | 4.5W/ft (15W/m) |
| Adhesive Backing | Yes | Max Run Length | 16.4' (5m) |
| Mounting method | Adhesive Tape | Compatible Connectors | AL-SL-CN-W-SPLICE / AL-SL-CN-W-PIGTAIL AL-SL-CN-W-JUMPER / AL-SL-CN-W-ANGLESPLICE-1 AL-SL-CN-W-TSPLICE |
| Average Lifespan | 50,000 Hours | ENVIRONMENTAL | |
| Warranty | 5 years | IP Rating | IP20 |
| PHOTOMETRIC | | Suitable Uses | Dry, Indoor |
| CRI | 90 | Max Operating Temp | -4 - 122° F (-20 - 50° C) |
| Max Luminous Flux | Up to 754.57 Lumens/ft (2475 Lumens/m) | Max Storage Temp | -22 - 176° F (-30 - 80° C) |
| Efficacy (lumens per watt) | Up to 165 Lumens/Watt | CONTROL | |
| Beam Angle | 120° | Dimmable | Yes |
| LED Color Options | 2700K, 3000K, 3500K, 4000K, 6000K | CV/CC/SPI/DMX | Constant Voltage |
| RGB Wavelength Ranges | N/A | STANDARDS/CERTS | |
| | | CE UL RoHS LM80 | |

TECHNICAL DRAWINGS

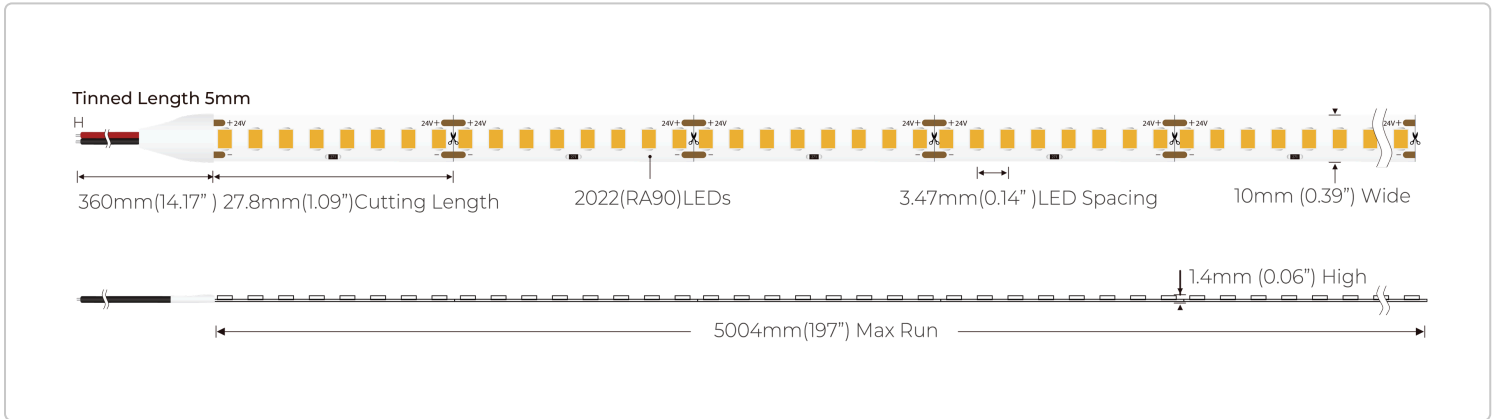

SKU BUILDER

AL-SL-AR-IP20-24

ARCHITECT LED STRIP LIGHT -
STATIC WHITE

WHITE COLOR OPTION

- 27K | 2700K WHITE
- 3K | 3000K WHITE
- 35K | 3500K WHITE
- 4K | 4000K WHITE
- 6K | 6000K WHITE



Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.