


WideLine LED Strip Light - Static White

AL-SL-W90-IP20-24

Static White LED Strip Light

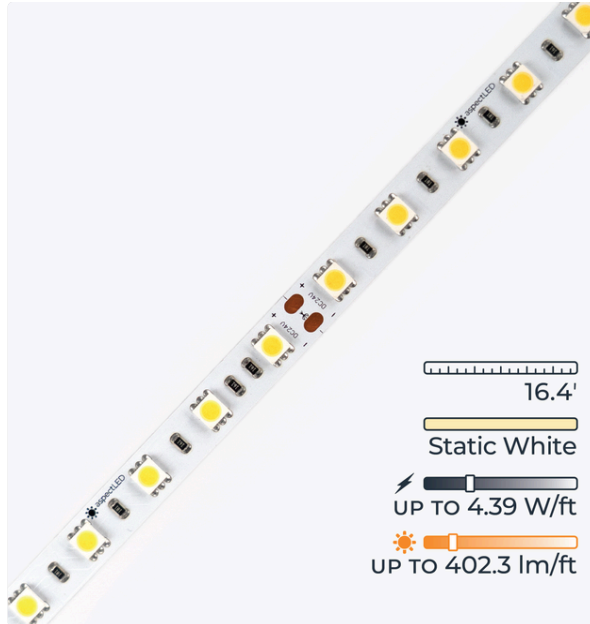


DESCRIPTION

The Static White WideLine LED Strip Light delivers bright, reliable illumination for dry-location architectural and accent lighting applications. With 90+ CRI and multiple white color temperatures from 2700K to 6000K, it provides accurate, natural-looking light for any space.

Featuring efficient SMD 5050 LEDs, WideLine produces up to 402 lumens per foot with a wide 120° beam angle for smooth, even illumination. The flexible design can be cut every 3.94" (100mm) for easy customization in cabinets, coves, displays, and more.

PHYSICAL		ELECTRICAL	
Dimensions	16.4' (5m) 0.39" (10mm) 0.09" (2.1mm)	Input Voltage	24VDC
Cut Length	3.94"	Efficacy	Up to 94.67 Lumens/Watt
Adhesive Backing	Adhesive Tape 3M 9080	LED Quantity	18 LED's/ft (60 LED's/m)
Mounting Method	Surface Mounted	Max. Power Consumption	4.39W/ft (14.4W/m)
Average Lifespan	50,000 Hours	Max Run Length	16.4' (5m)
Warranty	5 Years	Pin/Wire Count	2 pin
Weight	0.2 lbs	Max Wire Gauge	22 AWG
PHOTOMETRIC		LED Chip Type	SMD 5050
Max Lumens	Up to 402.32 Lm/ft (1320 Lm/m)	Compatible Connectors	AL-SL-CN-W-(PIGTAIL/JUMPER/SPLICE/ANGLESPLICE)
CRI	90	ENVIRONMENTAL	
Beam Angle	120°	IP Rating	IP20
LED Color Options	2700K 3000K 4000K 6000K	Suitable Uses	Dry Locations Only
CONTROL		Max. Operating Temp	-4 - 122° F (-20 - 50° C)
CV, CC, DMX or SPI	Constant Voltage	Max. Storage Temp	-22 - 176° F (-30 - 80° C)
Dimmable	Yes	STANDARDS	
		Certifications	CE UL RoHS LM80

TECHNICAL DRAWINGS

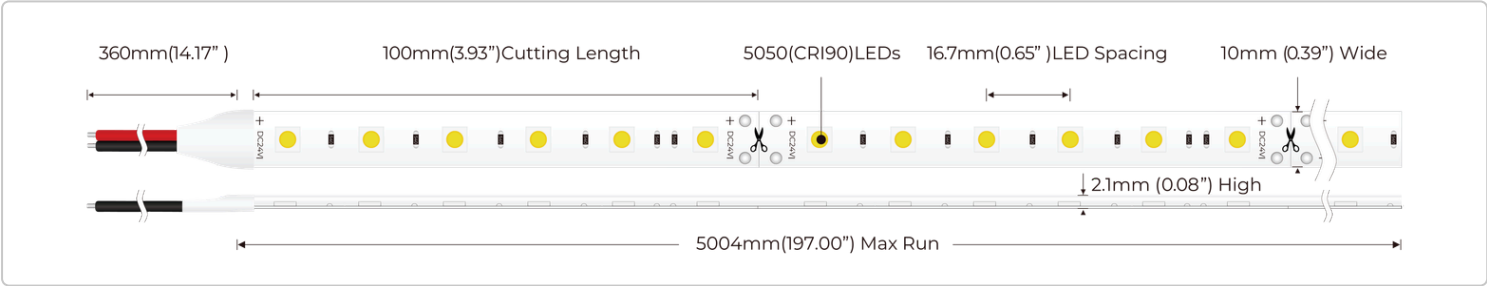

SKU BUILDER

AL-SL-W90-IP20

WIDELINE LED STRIP LIGHT

LED LIGHT COLOR TEMP
27K – 2700K Warm White
3K – 3000K Soft White
4K – 4000K Neutral White
6K – 6000K Day White



Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.