

LARGE IN-GROUND/IN-WALL LED LIGHT

9 LED - Ultra Bright (27W)

MODEL: AL-IG-L-27



Description

This 9W large light with 9 high power LEDs can be mounted in-ground or in-wall. Also available in an Standard Bright (9W) version. Perfect for patios, garden walls, decks, docks, gazebos, and many other locations.

Ideal for installation in stair safety/accent lighting, garden walls, building entrances, pathways, decks, gazebos, public parks, docks, and marine environments. These recessed in-ground/in-wall lights are waterproof (with an IP67 rating) and feature a #304 stainless steel trim and aluminum body. These lights come standard with a clear glass trim with stainless steel bezel.

[Learn more](#)



www.aspectLED.com | 888.503.1317 | sales@aspectled.com

For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice. Copyright © 2020 ASP Holdings, Inc. All rights reserved.


	12VDC	24VDC	120VAC
Light Fixture Dimensions (with mounting sleeve)	6.6" (168mm) diameter 4.8" (122mm) deep	6.6" (168mm) diameter 4.8" (122mm) deep	6.6" (168mm) diameter 4.8" (122mm) deep
Input Voltage	12VDC	24VDC	120VAC
Dimmable	No	No	No
Nominal Power Consumption	27 Watts	27 Watts	27 Watts
Max Luminous Flux of LED Array	1500 Lumens for Single Color 1350 Lumens for RGB (varies by LED color)	1500 Lumens for Single Color 1350 Lumens for RGB (varies by LED color)	1500 Lumens for Single Color 1350 Lumens for RGB (varies by LED color)
LED Type	SMD LED Chips	SMD LED Chips	SMD LED Chips
LED Quantity	9 - High Power 3 Watt LEDs	9 - High Power 3 Watt LEDs	9 - High Power 3 Watt LEDs
Beam Angle	30 Degrees	30 Degrees	30 Degrees
Housing Material	Precision Die-cast Aluminum	Precision Die-cast Aluminum	Precision Die-cast Aluminum
Trim Material	Brushed 304 Stainless Steel (316 available as special order) Clear Glass Lens	Brushed 304 Stainless Steel (316 available as special order) Clear Glass Lens	Brushed 304 Stainless Steel (316 available as special order) Clear Glass Lens
Weight	6.5 lbs	6.5 lbs	6.5 lbs
IP Rating	IP67	IP67	IP67
Lens	Optical, >85% efficient Contact us for availability on frosted lenses.	Optical, >85% efficient Contact us for availability on frosted lenses.	Optical, >85% efficient Contact us for availability on frosted lenses.
Glass	Step-tempered Glass	Step-tempered Glass	Step-tempered Glass
Waterproof Seal	Double silicon gasketed seal	Double silicon gasketed seal	Double silicon gasketed seal
Mounting Sleeve	Precision Die-cast Aluminum Sleeve	Precision Die-cast Aluminum Sleeve	Precision Die-cast Aluminum Sleeve
Suitable Uses	Dry, Damp, or Wet Locations	Dry, Damp, or Wet Locations	Dry, Damp, or Wet Locations
Estimated Lifespan	50,000 hours	50,000 hours	50,000 hours
Warranty	1 Year	1 Year	1 Year
Compatible Power Supplies	Non-Dimmable Power Supplies (Never use with MLV power supplies!)	Non-Dimmable Power Supplies (Never use with MLV power supplies!)	No Power Supply needed
Standards / Certifications	RoHS	RoHS	RoHS

Light Fixture Dimensions


ASSEMBLED VIEW




WITHOUT MOUNTING SLEEVE

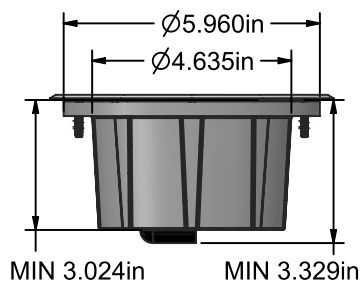


MOUNTING SLEEVE

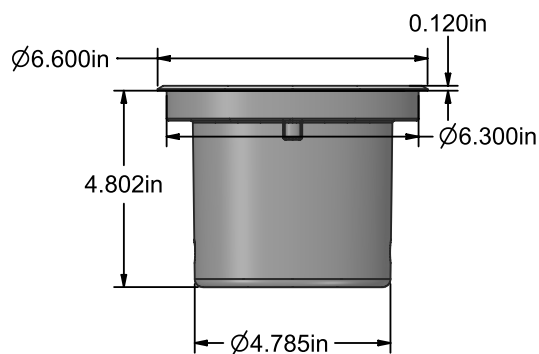


EXPLODED VIEW

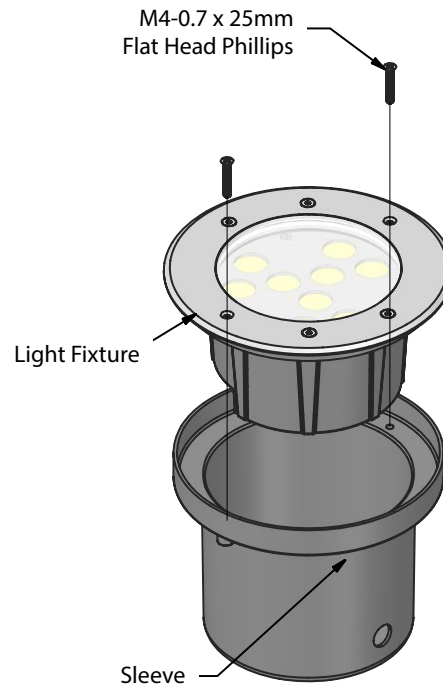

TOP VIEW

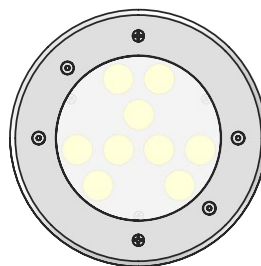

BACK VIEW



LARGE IN-GROUND/IN-WALL LED LIGHT - ULTRA BRIGHT
MODEL: AL-IG-L-27

Accessories

30 Watt LED Power Supply

SKU: AL-PS-W-30



60 Watt LED Power Supply

SKU: AL-PS-W-60



100 Watt LED Power Supply

SKU: AL-PS-W-100



200 Watt LED Power Supply

SKU: AL-PS-W-200



Touch! Wireless RGB

LED Controller*

SKU: AL-CTLR-TOUCH

** for color changing version only*



SKU Builder

MODEL #:

AL-IG-L-27

LED COLOR:

WW - Warm White
CW - Cool White
DW - DayWhite
R - Red
G - Green
B - Blue
Y - Yellow/Amber
RGB - RGB

VOLTAGE:

12V - 12VDC
24V - 24VDC
VAC - 120VAC

WIRE LEAD LENGTH:

2 Feet - [Leave Blank]
25FT - 25 feet
50FT - 50 feet
100FT - 100 feet