

### LARGE IN-GROUND/IN-WALL LED LIGHT

9 LED - RGB + White (36W)

**MODEL: AL-IG-L-36-RGBW** 







## Description

This 36W large well light with 9 RGBW high power LEDs can be mounted in-ground or in-wall. Also available in a single color or lower brightness versions. Perfect for patios, garden walls, decks, docks, gazebos, and many other locations.

Ideal for installation in stair safety/accent lighting, garden walls, building entrances, pathways, decks, gazebos, public parks, docks, and marine environments. These recessed in-ground/in-wall lights are waterproof (with an IP67 rating) and feature a #304 stainless steel trim and aluminum body. These lights come standard with a clear glass trim with stainless steel bezel.






Learn more



	24VDC
<b>Light Fixture Dimensions</b> (with mounting sleeve)	6.6" (168mm) diameter, 4.8" (122mm) deep
Input Voltage	24VDC
Dimmable	No
Nominal Power Consumption	36 Watts
Max Luminous Flux of LED Array	2200 Lumens (varies by LED color)
LED Type	RGBW SMD LED Chips
LED Quantity	9 - High Power RGBW Watt LEDs
Beam Angle	30 Degrees
Housing Material	Precision Die-cast Aluminum
Trim Material	Brushed 304 Stainless Steel (316 available as special order), Clear Glass Lens
Weight	6.5 lbs
Weight IP Rating	6.5 lbs
IP Rating	IP67
IP Rating Lens	IP67 Optical, >85% efficient, Contact us for availability on frosted lenses.
IP Rating  Lens  Glass	IP67  Optical, >85% efficient, Contact us for availability on frosted lenses.  Step-tempered Glass
IP Rating  Lens  Glass  Waterproof Seal	Optical, >85% efficient, Contact us for availability on frosted lenses.  Step-tempered Glass  Double silicon gasketed seal
IP Rating  Lens  Glass  Waterproof Seal  Mounting Sleeve	Optical, >85% efficient, Contact us for availability on frosted lenses.  Step-tempered Glass  Double silicon gasketed seal  Precision Die-cast Aluminum Sleeve
IP Rating  Lens  Glass  Waterproof Seal  Mounting Sleeve  Suitable Uses	Optical, >85% efficient, Contact us for availability on frosted lenses.  Step-tempered Glass  Double silicon gasketed seal  Precision Die-cast Aluminum Sleeve  Dry, Damp, or Wet Locations
IP Rating  Lens  Glass  Waterproof Seal  Mounting Sleeve  Suitable Uses  Estimated Lifespan	IP67  Optical, >85% efficient, Contact us for availability on frosted lenses.  Step-tempered Glass  Double silicon gasketed seal  Precision Die-cast Aluminum Sleeve  Dry, Damp, or Wet Locations  50,000 hours



# Light Fixture Dimensions

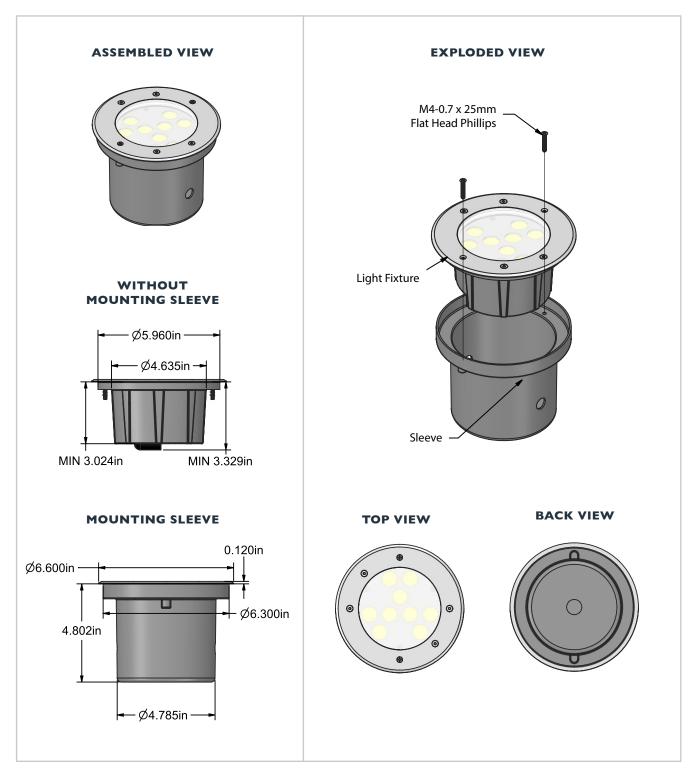

#### Accessories

30 Watt LED Power Supply

SKU: AL-PS-W-30

**60 Watt LED Power Supply** 

SKU: AL-PS-W-60

100 Watt LED Power Supply

SKU: AL-PS-W-100

200 Watt LED Power Supply

SKU: AL-PS-W-200







Touch! Wireless RGBW LED Controller

SKU: AL-CTLR-TOUCH-RGBW



Wireless RGBW Multi-Zone LED Wall Controller

SKU: AL-CTLR-RGBW-3ZRF-WMT



Wireless RGBW Multi-Zone LED Handheld Remote Controller SKU: AL-CTLR-RGBW-4ZRF-RMT



#### SKU Builder

AL-IG-L-36

MODEL #: LED COLOR:

RGBDW -

**RGBDW** - RGB+DayWhite

**VOLTAGE:** 

24V

**24V** - 24VDC

WIRE LEAD LENGTH:

2 Feet - [ Leave Blank ]

**25FT** - 25 feet **50FT** - 50 feet

**100FT** - 100 feet

4900 Constellation Drive | Saint Paul, MN 55127