



Modern Portrait Recessed Indoor/Outdoor LED In-wall Light

MODEL: AL-IWM-P

DESCRIPTION

aspectLED's Modern series in-wall recessed lights are bright, energy efficient, and attractively styled, making them perfect for virtually any application. Ideal for installation in garden walls, stairways, building entrances, elevator lobbies, pathways, or public parks.

These recessed in-wall lights are waterproof (with an IP65 rating) and feature a stainless steel trim and die-cast aluminum body. These lights come standard with a clear frosted trim.

CERTIFICATIONS



For general information purposes only.
Specifications, dimensions and construction
subject to change without notice.

Copyright © 2018 ASP Holdings, Inc. All rights reserved.
www.aspectled.com


PHYSICAL DIMENSIONS + SPECIFICATIONS

	12VDC	24VDC	120VAC
Exterior Trim/Face Dimensions	6-3/4" Tall, 4-1/4" Wide, 1/8" Thick	6-3/4" Tall, 4-1/4" Wide, 1/8" Thick	6-3/4" Tall, 4-1/4" Wide, 1/8" Thick
Recessed Fixture Dimensions	6" Tall, 3-5/8" Wide, 2-3/4" Thick	6" Tall, 3-5/8" Wide, 2-3/4" Thick	6" Tall, 3-5/8" Wide, 2-3/4" Thick
LED Driver Input Voltage	12VDC	24VDC	120VAC
Dimmable	No	No	No
Nominal Power Consumption	1.8 Watts	1.8 Watts	1.8 Watts
Max Luminous Flux of LED Array	90 Lumens	90 Lumens	90 Lumens
LED Type	SMD LED Chips	SMD LED Chips	SMD LED Chips
LED Quantity	24 - High Power LEDs	24 - High Power LEDs	24 - High Power LEDs
Beam Angle	60 Degrees	60 Degrees	60 Degrees
Housing Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Trim Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Operating Temperature	32° to 113° Fahrenheit (0° to 45° Celsius)	32° to 113° Fahrenheit (0° to 45° Celsius)	32° to 113° Fahrenheit (0° to 45° Celsius)
Weight	2 lbs	2 lbs	2 lbs
IP Rating	IP65	IP65	IP65
Lens	Optical, >85% efficient	Optical, >85% efficient	Optical, >85% efficient
Mounting Sleeve	Included ABS Plastic Sleeve	Included ABS Plastic Sleeve	Included ABS Plastic Sleeve
Mounting Sleeve Dimensions	6-3/8" Long, 3-7/8" Wide, 3" Tall	6-3/8" Long, 3-7/8" Wide, 3" Tall	6-3/8" Long, 3-7/8" Wide, 3" Tall
Suitable Uses	Exterior Dry, Damp, or Wet Locations	Exterior Dry, Damp, or Wet Locations	Exterior Dry, Damp, or Wet Locations
Estimated Lifespan	Up to 50,000 hours	Up to 50,000 hours	Up to 50,000 hours
Warranty	1 Year	1 Year	1 Year
Standards/Certifications	RoHS	RoHS	RoHS

Modern Portrait Recessed Indoor/Outdoor LED
In-wall Light

MODEL: AL-IWM-P

DIMENSIONS

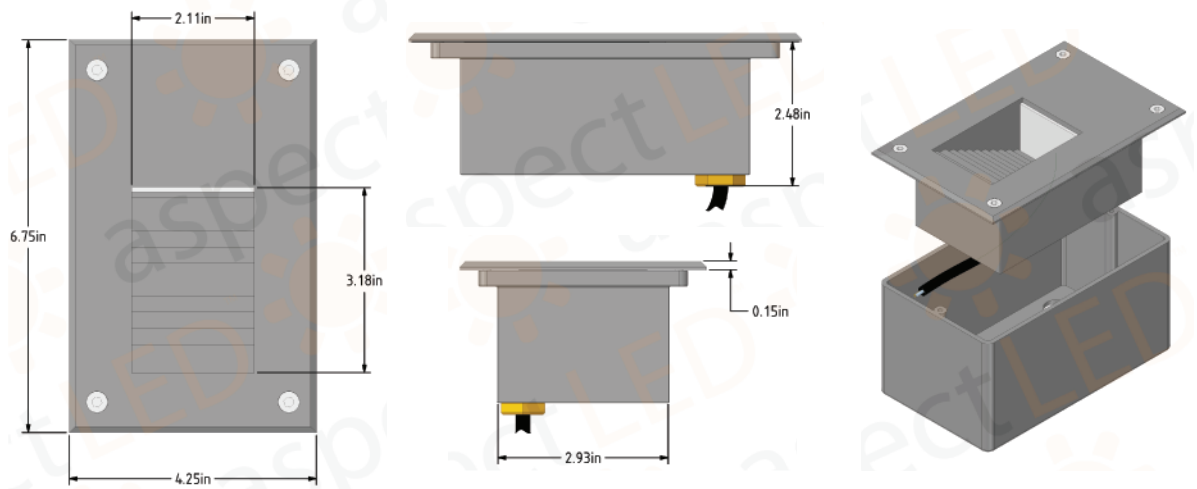

SKU BUILDER

Model Number	LED Color	Sleeve	Wire Lead Length
AL-IWM-P	<div>Warm White - WW</div> <div>Cool White - CW</div> <div>Day White - DW</div> <div>Blue - B</div> <div>Green - G</div> <div>Red - R</div> <div>Yellow - Y</div>	<div>No - N</div> <div>Yes - SLV</div>	<div>2 feet - [Leave Blank]</div> <div>25 feet - 25FT</div> <div>50 feet - 50FT</div> <div>100 feet - 100FT</div>