

## 2.75" Round Classic Low Voltage Puck Light - 3W (25 Watt Equivalent)

**MODEL: AL-PK-CL-3W**

### DESCRIPTION

aspectLED's puck lights are bright, energy efficient, and attractively styled, making them perfect for virtually any residential or commercial application.

Puck lights are trending because of their versatility and ability to fit into small areas and niches to provide light in areas other styles wouldn't be able to fit in – and with an easier install than other recessed or flush mount options. They work great for niches or wall cavities, under cabinets, display cases, or even general room lighting, and are a great alternative to our LED strip lights, or our higher power recessed lights. The low voltage design of these fixtures allows great flexibility with wiring during installation. While traditional incandescent, xenon, or halogen puck lights were known for generating a large amount of heat, LEDs won't get hot to the touch and are efficient and long lasting.

### PHYSICAL DIMENSIONS + SPECIFICATIONS


<b>Light Fixture Dimensions</b>	2-3/4" diameter, 7/8" thick
<b>LED Driver Input Voltage</b>	12VDC
<b>Dimmable</b>	Yes
<b>Nominal Power Consumption</b>	3 Watts
<b>Max Luminous Flux of LED Array</b>	250 Lumens (may vary based on LED color)
<b>Beam Angle</b>	60 Degree. Contact for other options.
<b>LED Type</b>	SMD LED Chips
<b>LED Quantity</b>	3 - High Power 1 Watt LEDs
<b>Fixture Material</b>	High performance aluminum alloy
<b>Wire Length</b>	3'
<b>Operating Temperature</b>	-4 degrees Fahrenheit (-20 Celsius) to +122 degrees Fahrenheit (+50 Celsius)
<b>Weight</b>	0.4 lbs
<b>Estimated Lifespan</b>	Up to 50,000 hours
<b>Warranty</b>	1 Year
<b>Suitable Uses</b>	Dry or Damp Locations
<b>Compatible Power Supplies</b>	Dimmable and Non-Dimmable Power Supplies Never use with MLV power supplies!
<b>Standards/Certifications</b>	UL Listed, RoHS

### CERTIFICATIONS



# 2.75" Round Classic Low Voltage Puck Light - 3W (25 Watt Equivalent)

**MODEL: AL-PK-CL-3W**

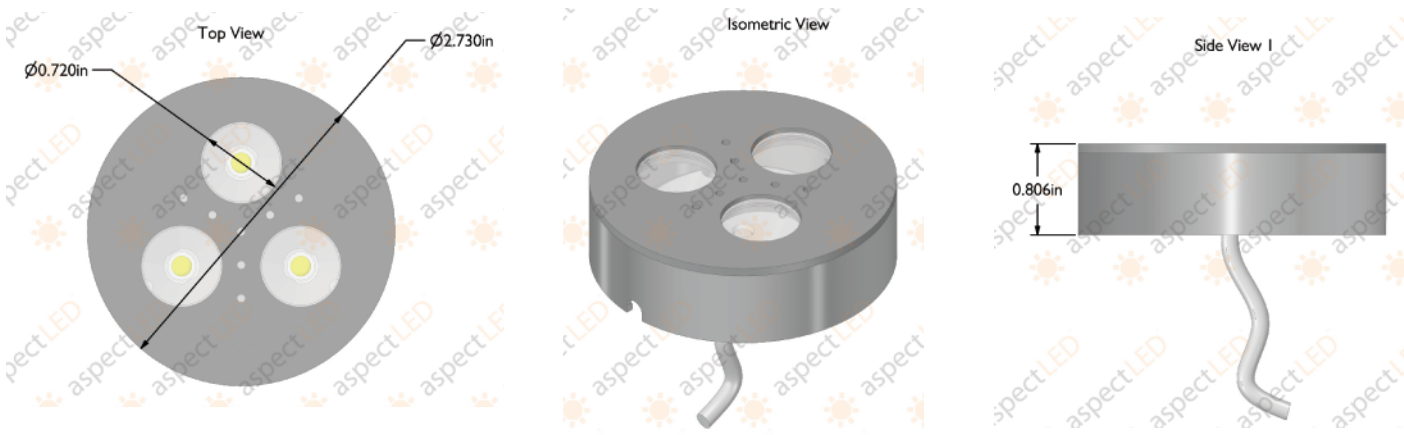

## SKU BUILDER

**Model Number**

AL-PK-CL-3W

**Voltage**

[Empty input box]

12VDC

**LED Color**

[Empty input box]

Warm White - WW  
Cool White - CW  
Day White - DW

**Housing Color**

[Empty input box]

Satin Nickel - SN  
White - WT  
Black - BK

## PHOTOMETRICS

\*Neutral white tested. Light output may vary by color temperature.

Beam Dia at 50% CBCP (inches)	Field Dia at 10% CBCP (inches)	Foot-candles at center beam	Lux at center beam	Distance from fixture
11.0"	22.0"	121.8	1311.04	2ft
16.0"	32.0"	53.6	576.95	3ft
23.0"	46.0"	28.6	307.85	4ft
24.0"	51.0"	18.5	199.13	5ft
29.0"	65.0"	12.9	138.85	6ft
42.0"	83.0"	7.2	77.5	8ft