


3.5" RGB LED Recessed Light

AL-RL-S-35-U-RGB

Ultrabright 9 Watt Round Recessed Light

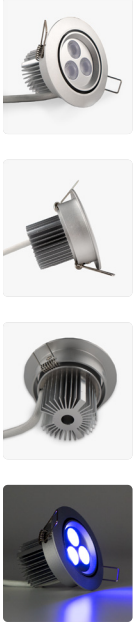

DESCRIPTION

These recessed lights are bright, energy efficient, and stylish—ideal for nearly any residential or commercial use. At just 2.42" tall, our 3.5" round RGB LED recessed light fits where traditional can lights can't, such as ceilings with ductwork, hot-roofs, or tight soffits. The adjustable LED face points straight down, making it compatible with sloped ceilings (up to 6/12 pitch). These lights also work well in flat ceilings as art spotlights or wall accent lights. Use the RGB color-changing feature to create a unique ambiance.


BEAM ANGLE

- 15 DEGREE SPOT
- 60 DEGREE FLOOD


VOLTAGE VARIETIES

- 12VDC
- 24VDC


KEY FEATURES



Up To 520 Lumens



15° or 60° Beam Angle



9 Watts

TRIM COLORS

Satin Nickel

White


Black

Dark Bronze


Brass

PRODUCT SPECIFICATION CHART

PHYSICAL			ELECTRICAL		
SPEC	12VDC	24VDC	SPEC	12VDC	24VDC
Fixture Dimensions	3-9/16" D (89mm) 2-7/16" H (64mm)		LED Driver Input Voltage	12VDC	24VDC
Driver Dimensions	3-3/4"L x 1-3/4"W x 1"H (95mm) x (44mm) x (25mm)		Nominal Power Consumption	9 Watts	
Cut-Out Hole Size	2-3/4" (70mm) Diameter		Max Lumen Output	Up To 520 Lumens	
Sloped Ceilings Angle Range	Up to 6/12 Pitch = 22.5°		Estimated Lifespan	50,000 Hours	
LED Type	RGB 3-in-1 SMD LED Chips		Dimmable	Yes	
LED Quantity	3 - 3 Watt RGB LEDs		ENVIRONMENTAL		
Fixture Material	Aluminum Alloy		Max Operating Temp	-4°F (-20°C) to 122°F (50°C)	
Finish Options	Satin Nickel, White, Black, Dark Bronze, or Brass		IC Rating	Not Rated for Contact with Insulation	
Weight	0.6 lbs		Suitable Uses	Dry or Damp Locations	
Warranty	1 Year		STANDARDS & CERTIFICATIONS		
Compatible Power Supplies	Non-Dimmable Power Supplies (Never use MLV)		RoHS CE		

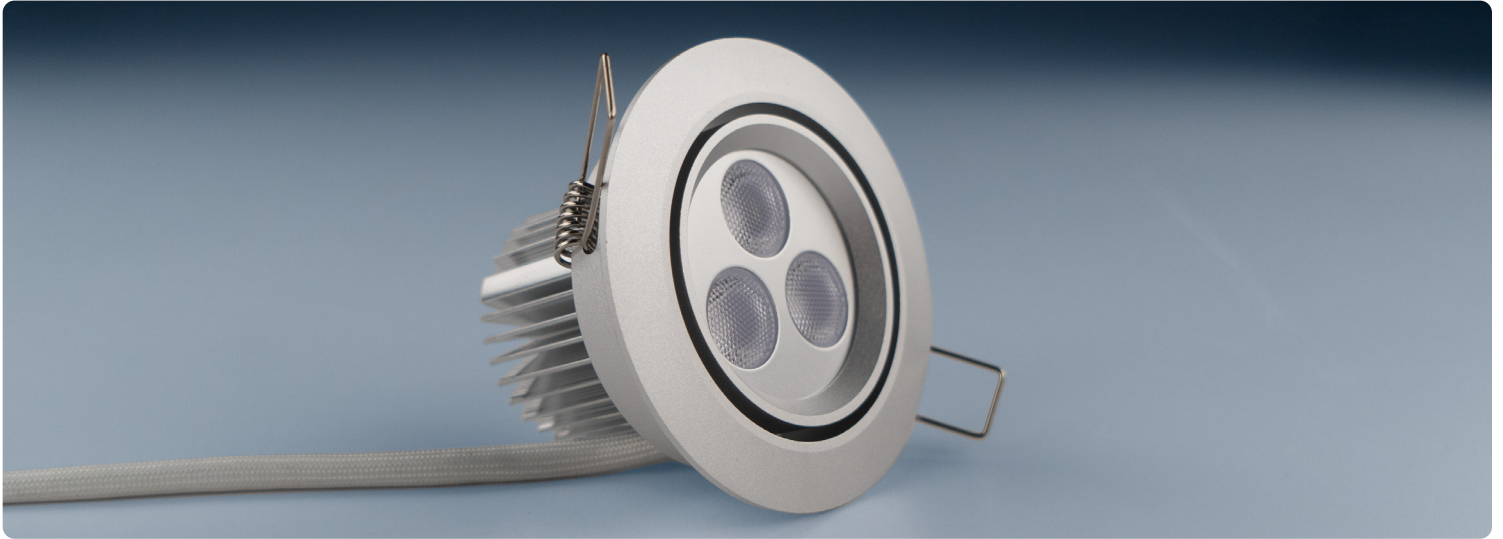


TECHNICAL DRAWINGS

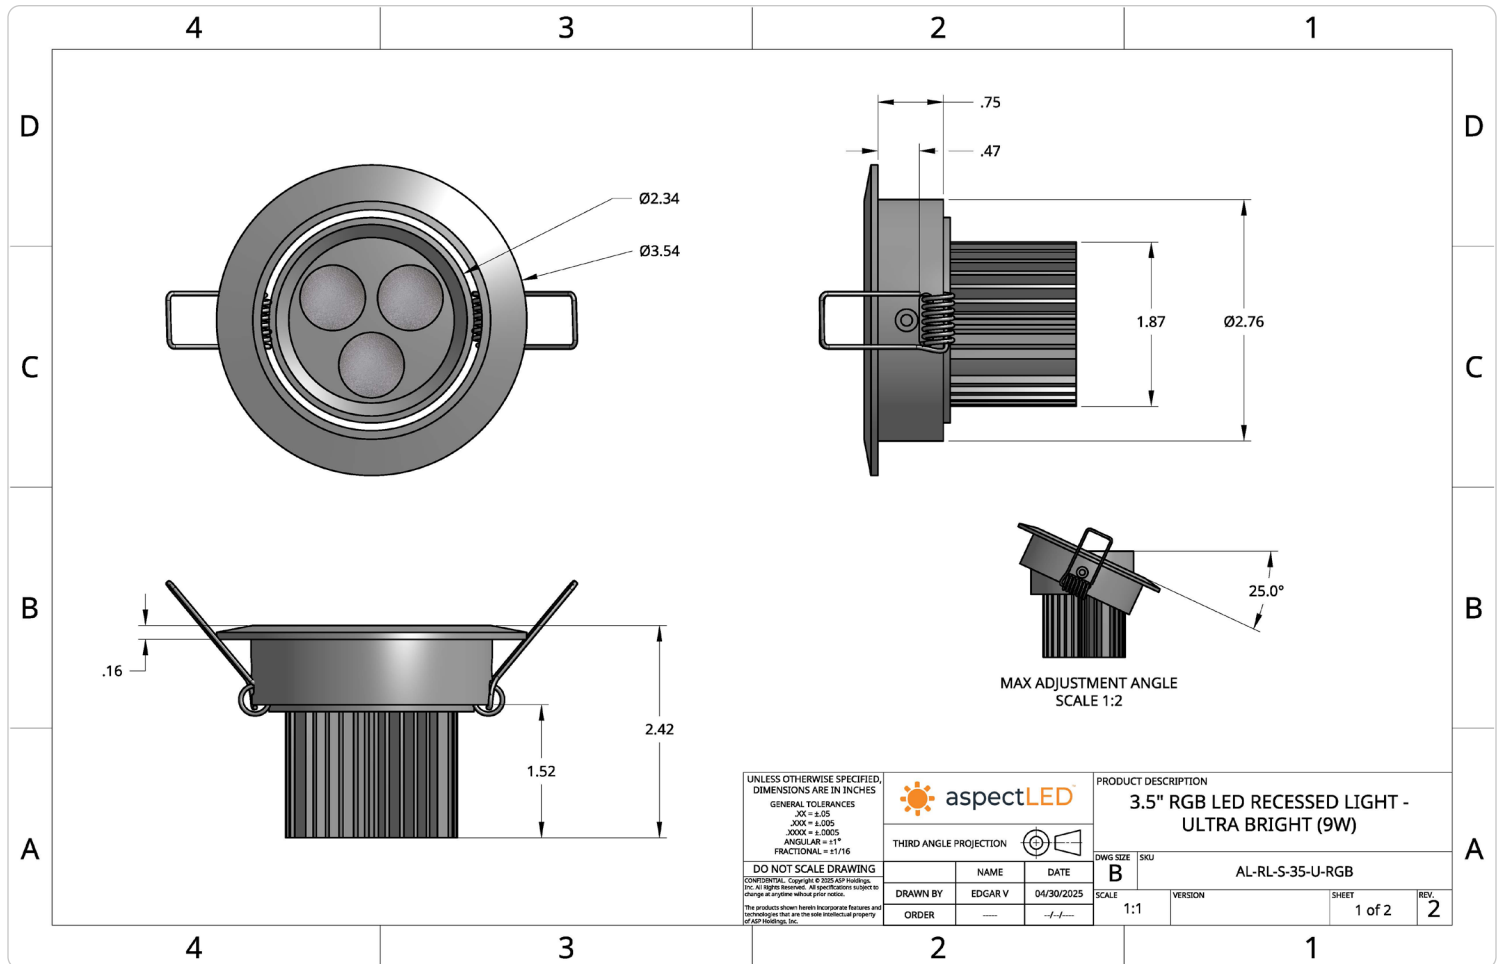

For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.

TECHNICAL DRAWINGS

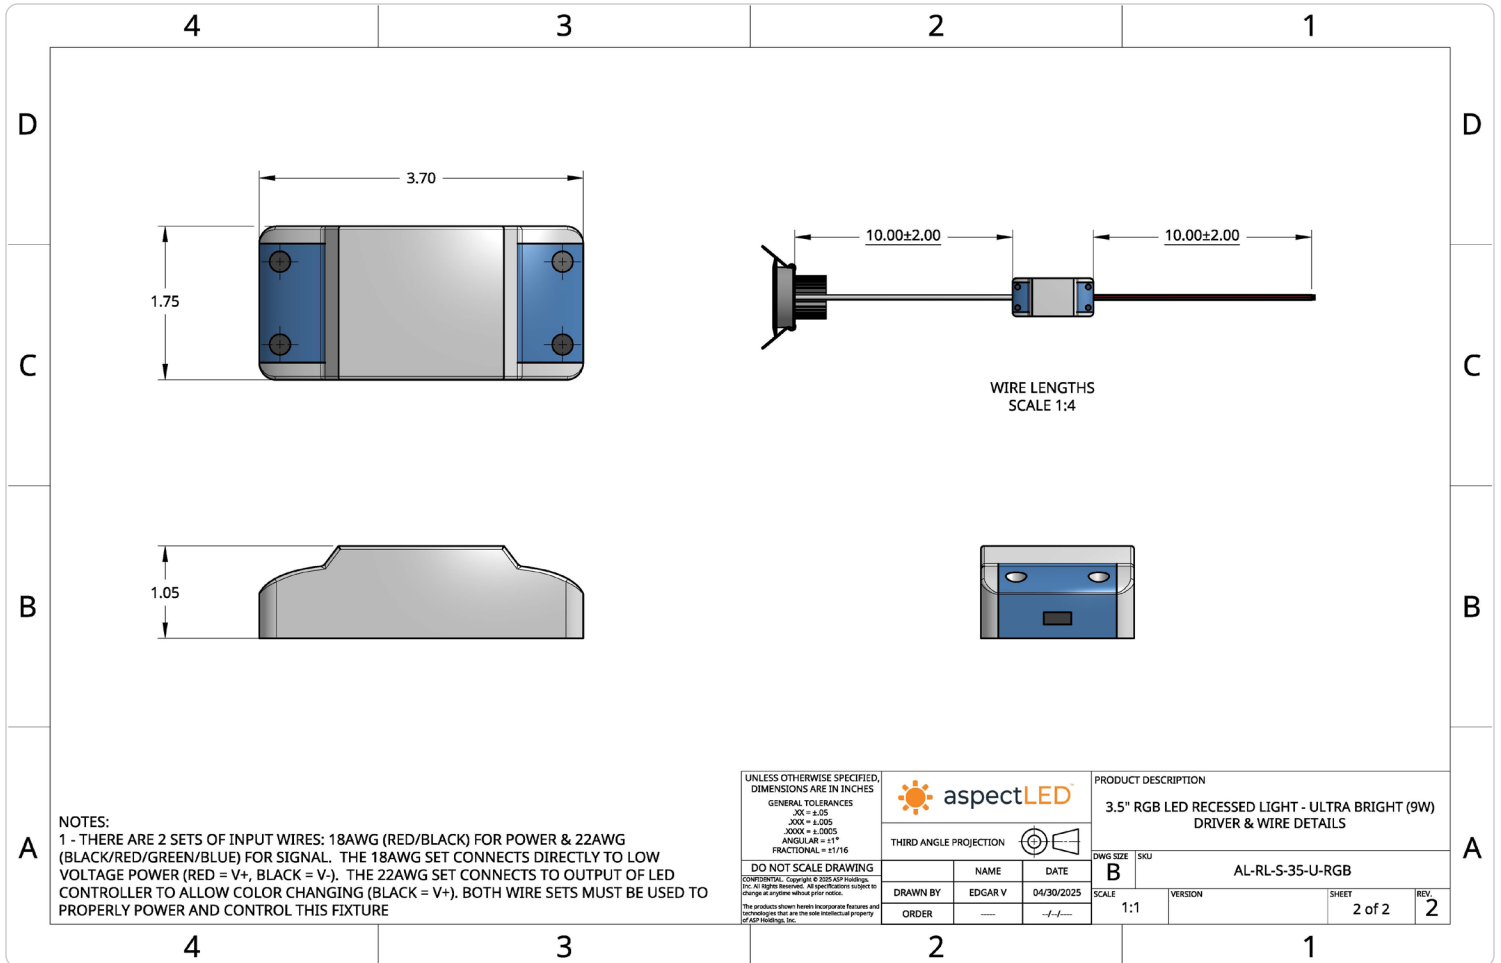

SKU BUILDER

AL-RL-S-35-U			
3.5" RECESSED LIGHT ROUND	VOLTAGE	TRIM COLOR	BEAM ANGLE
	12 VDC 24 VDC	SATIN NICKEL WHITE BLACK DARK BRONZE BRASS	15° SPOT LIGHT 60° FLOOD LIGHT

For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.