


Casambi 5 Channel PWM Controller

AL-CTRL-CBU-PWM5PRO

Bluetooth PWM Controller

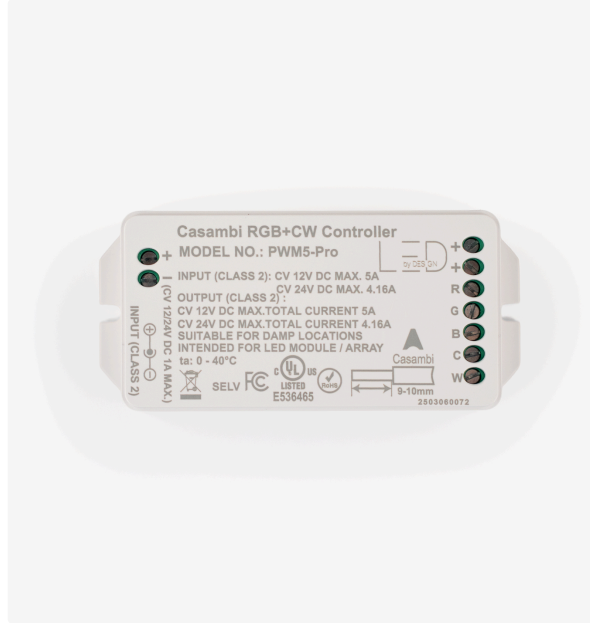

DESCRIPTION

The Casambi 5 Channel PWM Controller is a Bluetooth dimmer designed for constant voltage LED strip lights, neon flex, and light sheet systems. Built for flexibility and ease of use, this 5 channel controller supports static white, tunable white, RGB, RGBW, and CCT color systems. Casambi's Bluetooth mesh technology allows users to control up to 250 devices within a single network, making it one of the most scalable wireless lighting control systems available.

As a Class 2 device, the PWM 4 supports a maximum load of 96W at 24V or 48W at 12V. Control and configuration are handled through the Casambi mobile app, available on both iOS and Android.

KEY FEATURES



Bluetooth



RGBW
Compatible



App Control




Wireless

PRODUCT SPECIFICATION CHART

PHYSICAL		ENVIRONMENTAL	
Length	3.94" (100mm)	IP Rating	IP20
Width	1.85" (47mm)	Suitable Uses	Indoor Dry Locations
Height	0.89" (22mm)	Max Operating Temp	-4 to 122° F (-20 to 50° C)
Mounting method	Surface Mount	Max Storage Temp	-4 to 122° F (-20 to 50° C)
Color Finish Options	White	CONTROL	
Warranty	1 year	Control Method	Bluetooth
ELECTRICAL		STANDARDS & CERTIFICATIONS	
Input Voltage	12-24VDC	UL, FCC	
Max Output Power	12VDC=5A, 24VDC=4.16A		
Max Input Current	12VDC=5A, 24VDC=4.16A		

TECHNICAL DRAWINGS

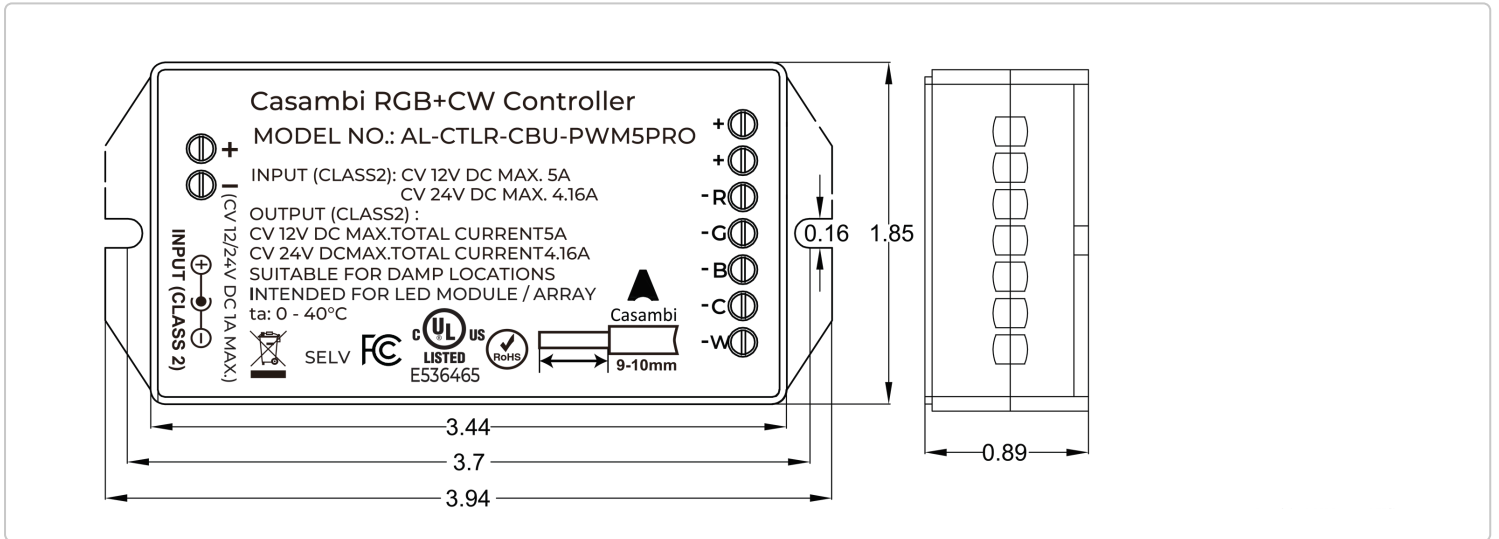

SKU BUILDER

AL-CTLR-CBU-PWM5PRO

CASAMBI 5 CHANNEL PWM CONTROLLER

Find It Online!

Scan the link to check out our online product pages and discover more about your product.

