

Summit LED Strip Light - Static White

AL-SL-DL-IP20-24

Single Color, Non-Waterproof



DESCRIPTION

The Static White Summit LED Strip Light delivers the highest level of performance in dotless LED strip lighting. Designed for visible installations, it creates a clean, continuous line of light with no visible diodes and no diffusion lens required. Built with advanced CSP technology, it provides smooth light output, improved efficiency, and enhanced reliability. The strip can be cut every 1.09 inches, making it easy to achieve the exact length your project requires.

Producing up to 600 lumens per foot, Summit is our brightest dotless strip light and delivers excellent efficiency at 140 lumens per watt, making it ideal for architectural and performance driven installations. With a high 90+ CRI and compatibility with dimmable power supplies, it provides crisp, natural light with full brightness control.


KEY FEATURES



PRODUCT SPECIFICATION CHART

PHYSICAL		ELECTRICAL	
Reel Length	16.4' (5m)	Input Voltage	24VDC
Width	0.393" (10mm)	LED Type	2022x
Height	0.11" (2.7mm)	LED Quantity	87 LED's/ft (288 LED's/m)
Cut Length	1.09" (27.77mm)	Max Power Consumption	4.5W/ft (15W/m)
Adhesive Backing	Yes	Max Run Length	16.4' (5m)
Mounting method	Adhesive Tape	Compatible Connectors	AL-SL-CN-DLS-SPLICE / AL-SL-CN-DLS-PIGTAIL AL-SL-CN-DLS-JUMPER / AL-SL-CN-DLS-ANGLESPLICE
Average Lifespan	50,000 Hours	ENVIRONMENTAL	
Warranty	5 years	IP Rating	IP20
PHOTOMETRIC		Suitable Uses	Dry, Indoor
CRI	90	Max Operating Temp	-4 - 122° F (-20 - 50° C)
Max Luminous Flux	Up to 640.24 Lumens/ft (2100 Lumens/m)	Max Storage Temp	-22 - 176° F (-30 - 80° C)
Efficacy (lumens per watt)	Up to 140 Lumens/Watt	CONTROL	
Beam Angle	180°	Dimmable	Yes
LED Color Options	2700K, 3000K, 3500K, 4000K, 6000K	CV/CC/SPI/DMX	Constant Voltage
RGB Wavelength Ranges	N/A	STANDARDS/CERTS	
		CE UL RoHS LM80	

TECHNICAL DRAWINGS

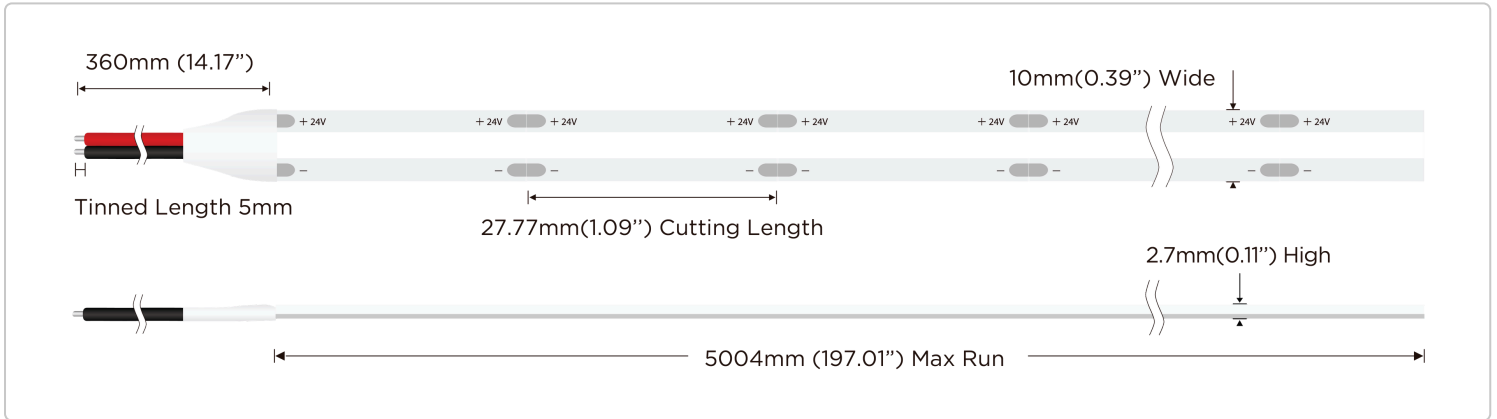

SKU BUILDER

AL-SL-DL-IP20-24

**SUMMIT LED STRIP LIGHT
- STATIC WHITE**

WHITE COLOR OPTION

- 27K** | 2700K WHITE
- 3K** | 3000K WHITE
- 35K** | 3500K WHITE
- 4K** | 4000K WHITE
- 6K** | 6000K WHITE



Find It Online!

Scan the link to check out our online product pages and discover more about your product.



For general information purposes only. Specifications, dimensions and construction not guaranteed and are subject to change without notice.