

L-SERIES DOTLESS™ LINEAR LED STRIP LIGHT

MODEL: AL-SL-L-U







Description

Introducing aspectLED's Dotless™ Linear LED Strip Lights. This continuous LED strip is the perfect solution for a wide variety of applications, especially for those installations where you don't want to see the individual diodes. Requiring no diffusing lens makes the L-Series installation even easier. Our L-Series Dotless LED strip lights are made with wire leads on both ends of each 16.4′ reel and can be cut every .7″(12VDC) or 1.78″(24VDC), allowing you to cut pieces to the exact length that you need.









Learn more




	NON-WATERPROOF	WATER RESISTANT		
Dimensions	5/16" (8mm) wide 1/16" (2mm) thick 16.4' (5M) long	7/16" (11mm) wide 3/16" (4mm) thick 16.4' (5M) long		
Cut Length	12VDC: 0.7" (17.85mm) 24VDC: 1.78" (45.45mm)	12VDC: 0.7" (17.85mm) 24VDC: 1.78" (45.45mm)		
IP Rating	IP20 Indoor Use Dry Location	IP65		
PCB Width	8mm	8mm		
CRI	>90	>90		
Adhesive Backing	Yes / 3M Adhesive	Yes / 3M Adhesive		
Mounting Method	Adhesive Backing Adhesive Backing			
Input Voltage	12VDC or 24VDC	12VDC or 24VDC		
Beam Angle	120 Degrees	120 Degrees		
Dimmable	Yes	Yes		
Max Power Consumption	12VDC: 3.7 Watts per foot 12VDC: 3.7 Watts per foot 24VDC: 4.3 Watts per foot 24VDC: 4.3 Watts per foot			
LED Light Color	Warm White (3000K), Cool White (4000K), DayWhite (6000K), Blue, Red, Yellow/Amber	K), DayWhite (6000K), Blue, Red, (4000K), DayWhite (6000K), Blue, Red,		
Max Luminous Flux	12VDC: 304 Lumens per foot 24VDC: 425 Lumens per foot (varies by LED color) 12VDC: 304 Lumens per foot 24VDC: 425 Lumens per foot (varies by LED color)			
Max Run	16.4 feet @ 24VDC 16.4 feet @ 24VDC			
Weight	0.4 lbs per reel	0.7 lbs per reel		
Estimated Lifespan	50,000 hours	50,000 hours		
Warranty	1 Year	1 Year		
Suitable Uses	Dry Location Only	Dry, Damp Locations		
Standards/Certifications	UL Listed, RoHS	UL Listed, RoHS UL Listed, RoHS		




Strip Light Dimensions

12VDC - NON-WATERPROOF

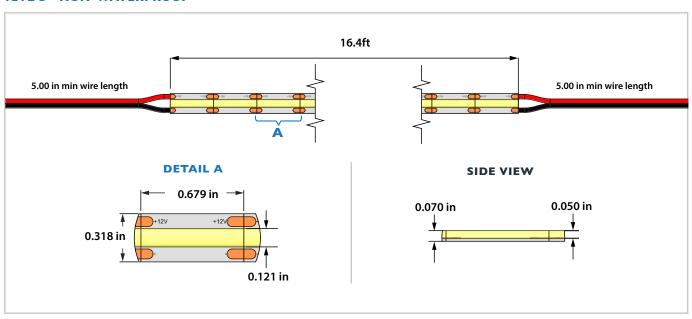


24VDC - NON-WATERPROOF

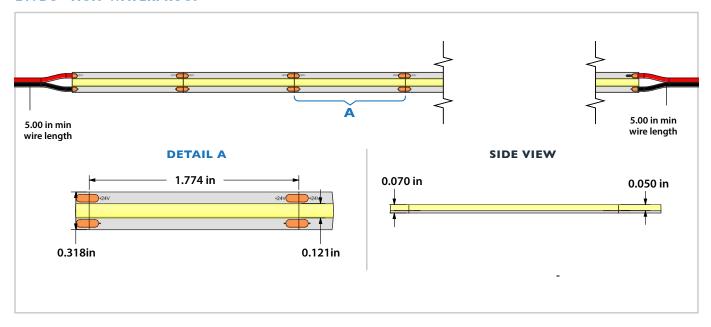


Strip Light Dimensions

12VDC - WATER RESISTANT

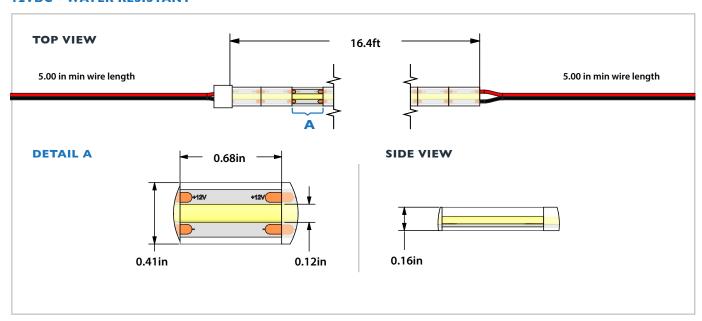

24VDC - WATER RESISTANT

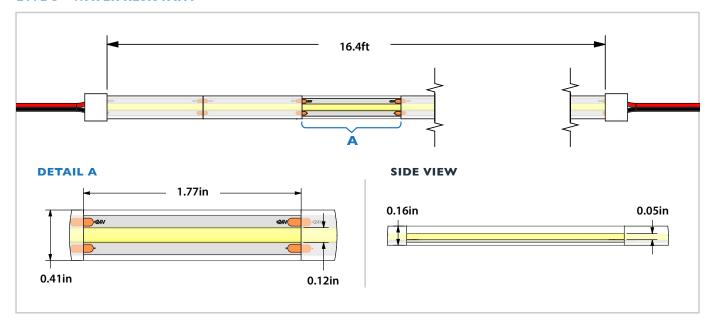

Accessories

60 Watt LED Power Supply

SKU: AL-PS-N-60

100 Watt LED Power Supply SKU: AL-PS-N-100

200 W-++ | FD D----- C----

200 Watt LED Power Supply SKU: AL-PS-N-200







Wireless (RF) LED Dimmer

SKU: AL-CTLR-RFDIM

In-Wall 12VDC-24VDC PWM LED Dimmer Switch (100W)
SKU: AL-CTLR-PWMDIM I 00-W

DMX512 Decoder and LED Driver SKU: AL-CTLR-DMXDEC







SKU Builder

MODEL #:	WATERPROOFING:	BRIGHTNESS:	LED LIGHT COLOR:	VOLTAGE:
AL-SL —	_	$\boxed{ U } -$	_	
	LN - Non-Waterproof LR - Water Resistant	U - Ultra Bright	WW - Warm White NW - Cool White DW - DayWhite B - Blue Y - Yellow/Amber R - Red	12 - 12VDC 24 - 24VDC